
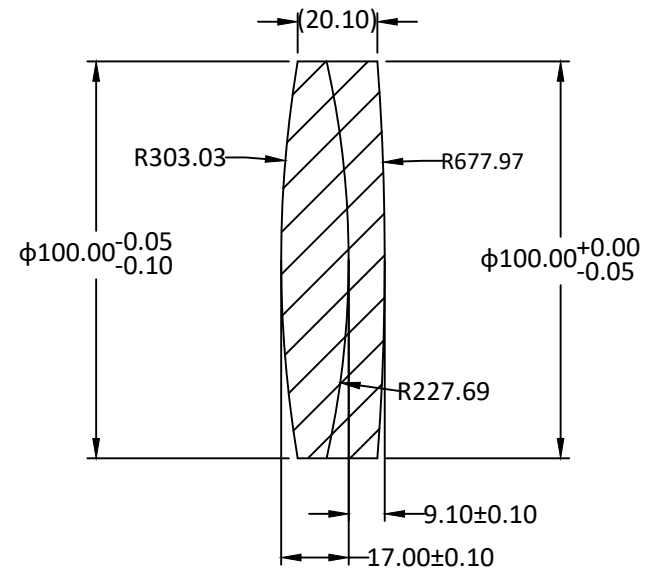


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
303.03 CX	±0.30	-	1	95	100.00	-0.05/-0.1	N-BK7	517-642	17.00	±0.10
227.69	±0.20	-	1	95	100.00	+0/-0.05	N-SF5	673-322	9.10	±0.10
677.97 CX	±0.70	-	1	95						

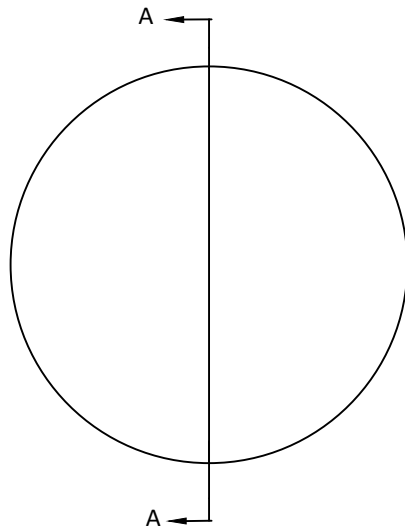

SECTION A-A

Notes:

- ALL DIMENSIONS IN MM
- TOLERANCE UNLESS SPECIFIED ± 0.10
- MATERIAL GRADE B, FA PER MIL-G-174, SCHOTT OR EQUIVALENT, RoHS COMPLIANT
- MANUFACTURE PER MIL-PRF-13830
- POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
- SURFACE QUALITY : 60-40 SCRATCH-DIG
- CHAMFER EDGES: $0.5 \times 45^\circ$ MAX UNLESS SPECIFIED
- CENTRATION TOLERANCE: 3.0' MINUTES MAX
- EFL: 500MM $\pm 2\%$
- DESIGN WAVELENGTH: 587.6NM
- COATING: S1 & S3: $R_{avg} < 0.35\%$ @ 420-680nm @ 0° AOI
- CEMENT USUNG NORLAND NOA61 OR EQUIVALENT

UNLESS OTHERWISE SPECIFIED:			NAME	DATE			
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05		DRAWN	Sally Song	12.16.24	TITLE: DIAMETER 100MM, EFL 500MM, VIS 0 COATED, ACHROMAT LENS		
		CHECK					
		ENG APPR.					
		MFG APPR.					
INTERPRET GEOMETRIC TOLERANCING PER:		QA	Ann Chen	12.18.24	REV 0		
MATERIAL		COMMENTS					
FINISH							
DO NOT SCALE DRAWING		PROJECT NO.			SCALE: 1:1	WEIGHT:	SHEET 1 OF 1